

CEN-PE-CO HYDRA-TRAN TORQUE FLUID

A heavy-duty power transmission fluid formulated with the heat resistance of 100% pure paraffin base oil and the protection of high performance additives. It excels as a power shift transmission fluid, torque converter fluid, automatic transmission fluid, power steering fluid, and high performance hydraulic oil.

PROVIDES SUPERIOR:

Heat Resistance
Anti-Wear Protection
Corrosion Resistance
Lubricant and Equipment Life

SPECIFICATIONS:

DEXRON[®] II
Ford MERCON[®] (pre-1992)
Ford M2C138-CJ, M2C166-H
General Motors 6137
Allison C-3, C-4

Caterpillar TO-2
Sundstrand Hydraulic Pump
Denison Hydraulic
Sperry Vickers Hydraulic
AGCO 411

NOTES:

DEXRON[®] III is an SAE 0W-20 fluid. Central Petroleum Company believes that Dexron III specifications are inadequate for heavy-duty use. Hydraulic and hydrostatic pump manufacturer, Sauer Sundstrand, does not recommend the use of Dexron III (Bulletin PIB-9613).

Cen-Pe-Co Hydra-Tran Torque Fluid can reduce heat and wear while providing longer fluid life than Dexron III products. It is highly recommended for Allison transmissions calling for “Dexron III or C-4” and many other heavy-duty applications.


DEXRON is a registered trademark of General Motors Corporation
MERCON is a registered trademark of Ford Motor Company

Central Petroleum Company

11810 Madison Ave.
Cleveland, OH 44107-0597

201 East Lincoln Street
Walcott, IA 52773-0116

800-553-1891 FAX 563-284-5124

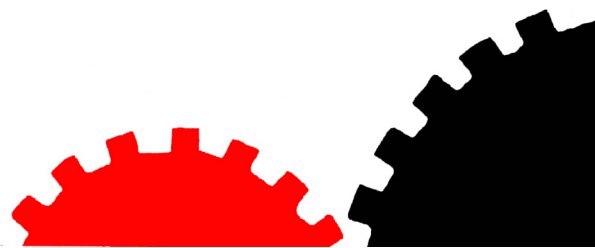

CEN-PE-CO HYDRA-TRAN TORQUE FLUID

CONTAINERS:

55 gallon drum	20 gallon drum
35 gallon drum	5 gallon pail

TYPICAL CHARACTERISTICS:

Viscosity	
SAE	5W-20
cSt @ 40o C	37
cSt @ 100o C	7.3
SUS @ 100° F	172
SUS @ 210° F	50
Viscosity Index	150
Pour Point	-40° F
Seal Compatibility (Ford Procedure)	Pass
Color	Red