

## **CEN-PE-CO AUTOMATIC TRANSMISSION FLUID**

A heavy duty automatic transmission fluid exceeding the requirements of both DEXRON® II and Ford MERCON® (pre-1992 version) specifications.

### **OUTSTANDING FEATURES AND BENEFITS:**

100% pure paraffin base for  
exceptional heat resistance  
Compatible with all seal materials

Reduces wear  
Excellent rust and oxidation protection  
Extends transmission life

### **EXCEEDS SPECIFICATIONS:**

DEXRON® II  
Ford MERCON® II (pre-1992)  
Ford M2C138-CJ, M2C166-H  
General Motors 6137  
Allison C-3, C-4

Caterpillar TO-2  
Sunstrand Hydraulic Pump  
Denison Hydraulic  
Sperry Vickers Hydraulic  
AGCO 411

### **CONTAINERS:**

55 Gallon Drum  
35 Gallon Drum  
20 Gallon Drum

5 Gallon Pail  
1 quart can (24 per case)

### **TYPICAL CHARACTERISTICS:**

#### Viscosity

SUS @ 210° F.	50
SUS @ 100° F.	172
cSt @ 100° C.	7.3
cSt @ 40° C.	37

#### Viscosity Index

150

#### Flash Point

380° F.

#### Pour Point

-40° F.

#### Seal Compatibility (GM & Ford Methods)

Pass

#### Color


Red

### **Central Petroleum Company**

11810 Madison Ave.  
Cleveland, OH 44107-0597

201 East Lincoln Street  
Walcott, IA 52773-0116

800-553-1891 FAX 563-284-5124

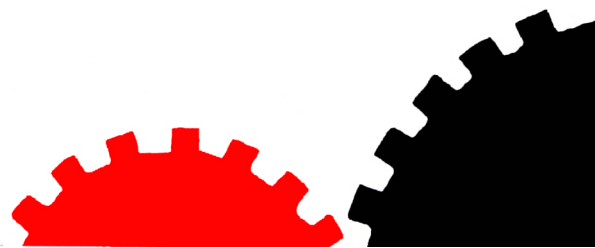

## **CEN-PE-CO AUTOMATIC TRANSMISSION FLUID**

### **LIMITATIONS:**

Cen-Pe-Co Automatic Transmission Fluid is not recommended for:

- Transmission calling for DEXRON® III
- Transmissions calling for MERCON V
- Post-1992 transmissions calling for MERCON®
- Applications at temperatures below -40° F.

Cen-Pe-Co Synthetic Blend ATF exceeds these specifications and is recommended in these applications.

Central Petroleum Company believes that most fluids designed to meet the cold temperature flow requirements of these newer specifications lack the film strength needed for heavy-duty applications. Cen-Pe-Co Automatic Transmission Fluid is superior for any application calling for DEXRON® II or pre-1992 MERCON®.